


ATH 7260

Product Images

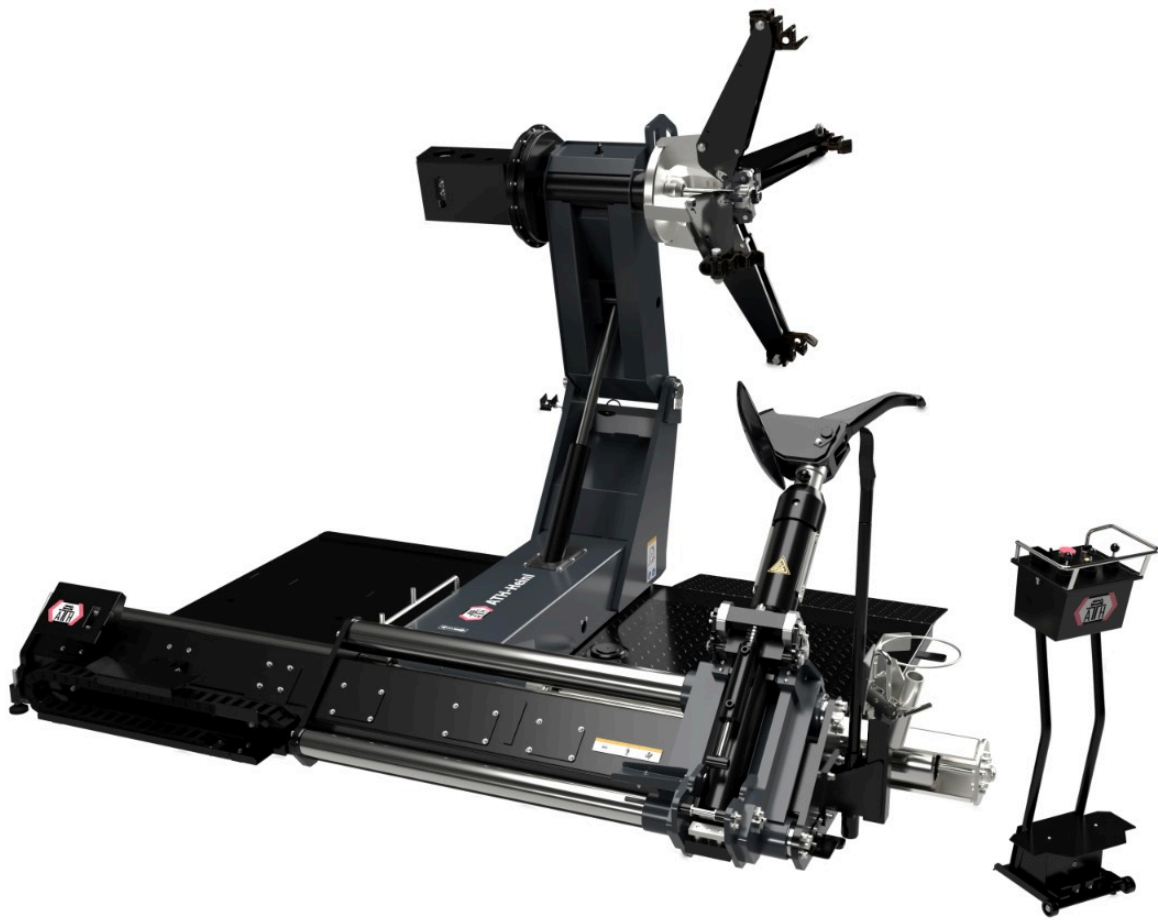

Description

- Fully automatic wireless control / operation, via mobile standalone wireless control unit, battery operated
- Electro-hydraulic drive with 2 movement speeds & 3 assembly speeds (4, 6 & 10 rpm)
- Wheel / tyre disassembly & assembly combinations up to 60", 3.100 kg weight, 3.100 mm diameter & width up to 1.810 mm
- Self-centering, multifunctional holder with pre-adjustable & expandable 4-clamping jaw system
- Movable wireless control unit equipped with joysticks and foot pedals
- Ideally suited for agricultural, forestry, construction, truck and commercial vehicle tires (with optional accessory also for aluminium rims)

Additional Information

Rim diameter max.	110 – 1.270 mm
Clamping range extended	110 – 1.530 mm
Rim diameter max.	60"
Max. wheel diameter	3.100 mm
Max. Wheel width	1.810 mm
Wheel weight max.	3.100 kg
Bead breaker force	8.000 kg
Mounting speeds	4 – 6 – 10 U/min
Driving power	4,8 / 5,6 kW
Power supply voltage	3x 400V / C32A
Noise level	70 dB(A)

