


ATH Four Lift® 55AP

Product Images

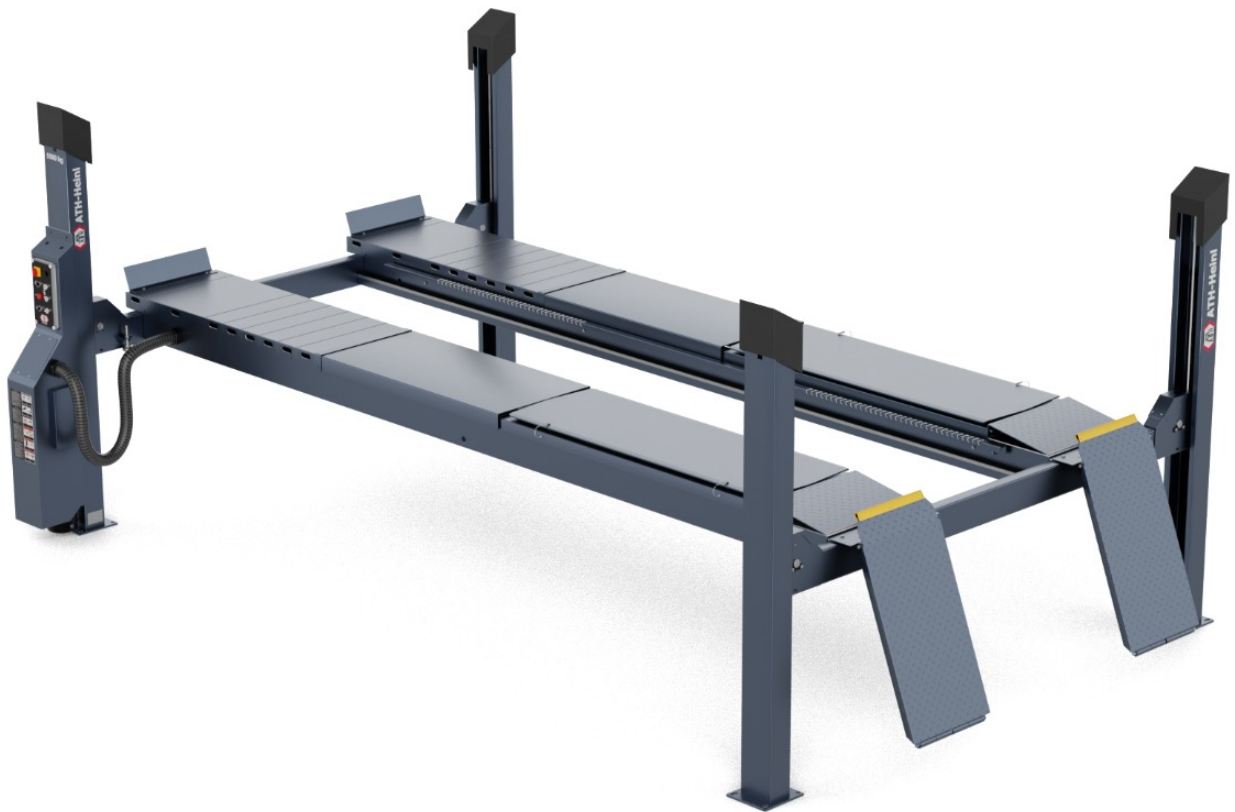

Description

- Electro-hydraulic 4-post lift with quick lift unit and load-dependent lowering function
- Central operating unit, including unit cover
- ATH Four Lift 55AP: Level running rail with integrated wheel alignment kit
- ATH Four Lift 55P: level running rail, optional wheel alignment kit
- Precisely levelable notch and rail system
- Safety Control: Electropneumatic safety locks that automatically unlock with lifting and lowering
- Safety Lock: ability to lock the load on to the safety mechanism
- Multifunctional mounting via continuously adjustable rails
- Perfect platform protection made of special polymer and double powder coating

Additional Information

Color	Anthrazitgrau / Schwarz
Rated load capacity	5.500 kg
Lifting height max.	2.045 mm
Drive-on-height	275 mm
Total platform length	5.600 mm
Total platform width	650 mm
Driving power	4 kW
Lifting/Lowering time	ca. 45 s
Power supply voltage	3x 400V / C16A
Concrete strength	min. C20/25 7.400 x 3.900 x 200 mm

